



Superior  
Manufacturing  
Group, Inc.


[www.MattingExperts.com](http://www.MattingExperts.com)

Toll Free (800) 858-3417

Int'l. +1(301) 734-6036

Fax. +1(267) 295-8676

## 340 Soil Guard™ / 350 Soil Guard™ w/Grit Outdoor Entrance Matting

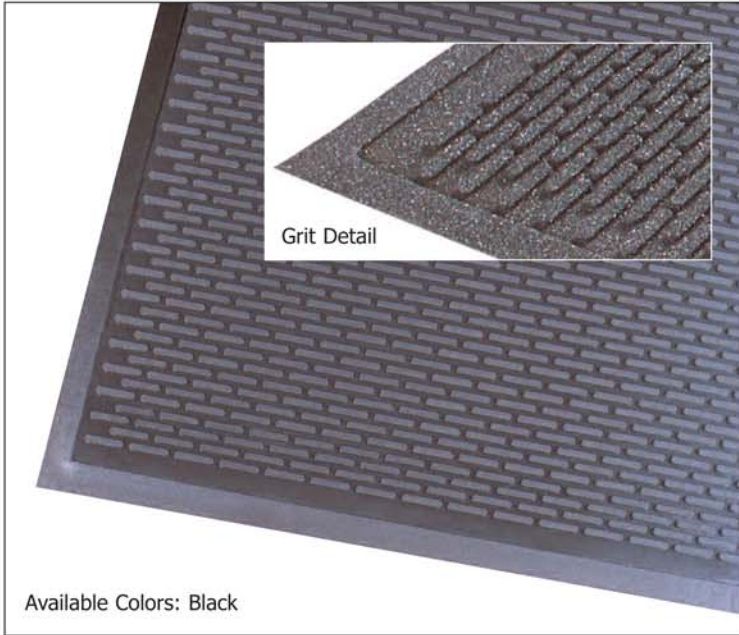

Available Colors: Black

**NO TRAX**  
FLOOR MATTING

Outdoor



**S**oil Guard™ is a durable outdoor entrance mat intended to guard against soil with its high-low scraping design. Its low profile allows for easy door clearance as well as regular cart traffic, while a specially formulated rubber allows Soil Guard™ to withstand harsh weather environments and heavy foot traffic. Soil Guard™ excels in both indoor and outdoor high traffic entryways, and can be hosed off for easy cleaning. The 350 version is available with a silicon carbide grit surface for additional traction.

Test	Test Description	*Results
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	3.33 Grams (7.8%)
Accelerated Wear	Test specimen is subjected to the action of rollers under a specified load. Sample is rotated 10° after each pass. Results measured in thickness loss (%)	0.00% (No measurable loss)
Colorfastness	Test specimen is exposed to a predetermined amount of radiant energy. The lightfastness is assessed by comparing portions of the sample with the AATCC Gray Scale to evaluate color change.	(Based on visual inspection) 4.5
Water Retention	Test specimen is submerged in water for 5 minutes, removed, drained for 15 seconds and weighed. Results measured in weight gain. (Gallons per sq. yd.)	.02
Flammability ASTM D2859 (CPSC FF 1-70)	Intended to measure the matting's response to an ignition source in a controlled environment. The uncharred area of the test specimen must be greater than 1 inch to pass.	3.6 Inches

\*All testing of NoTrax® floor matting has been performed by an independent testing laboratory.

AATCC Rating Key (For Colorfastness Test)	
5	No change
4	Slight change
3	Noticeable change
2	Considerable change
1	Severe change



Outdoor Use

- Natural/SBR Rubber Compound
- Weight: 11 lbs
- Thickness: 1/4"
- Stock Sizes: 3' x 5'



RESULTS FROM INDEPENDENT TEST LABS & PERFORMANCE IN OVER 20 YEARS OF SERVICE