




Superior
Manufacturing
Group, Inc.

www.MattingExperts.com

Toll Free (800) 858-3417
Int'l. +1(301) 734-6036
Fax. +1(267) 295-8676

231 Prelude™
Entrance Matting

Available Colors: Blue, Gray, Burgundy, Black, Brown

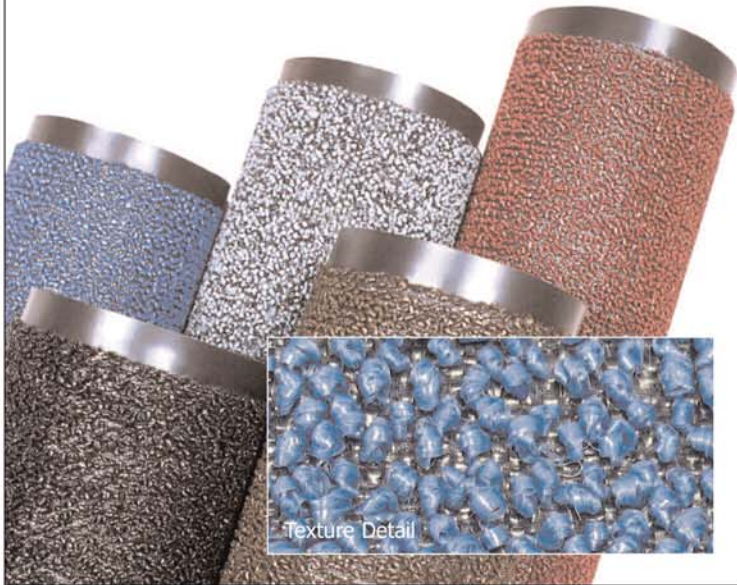

NO TRAX®
FLOOR MATTING

Good Better Best Superior



Prelude™ is a scraper mat made up of a coarse loop-twisted non-absorbent fiber that can be placed outside the entrance to begin the removal of dirt and debris from foot traffic. These aggressive fibers resist crushing while entrapping debris and preventing it from entering the facility. This mat can be used as part of the coordinated "Stages" series. A heavyweight vinyl non-slip backing ensures minimum movement.

Test	Test Description	*Results
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	1.00
Accelerated Wear	Test specimen is subjected to the action of rollers under a specified load. Sample is rotated 10° after each pass. Results measured in thickness loss (%)	26.90%
Accelerated Soiling ASTM D6540-00	Test specimen is subjected to an accelerated soiling process for a predetermined length of time. The sample is vacuumed, rated, submitted to an extraction device, then rated again.	(Based on visual inspection) 3-4 - Vacuum Rating 5 - Rating After Extraction
Water Retention	Test specimen is submerged in water for 5 minutes, removed, drained for 15 seconds and weighed. Results measured in weight gain. (Gallons per sq. yd.)	.19
Flammability ASTM D2859 (CPSC FF 1-70)	Intended to measure the matting's response to an ignition source in a controlled environment. The uncharred area of the test specimen must be greater than 1 inch to pass.	N/A

*All testing of NoTrax® floor matting has been performed by an independent testing laboratory.

AATCC Rating Key (For Accelerated Soiling Test)	
5	No change
4	Slight change
3	Noticeable change
2	Considerable change
1	Severe change



- Face Weight: 19 oz. per sq. yd.
- Thickness: 1/4"
- Vinyl Backing reduces mat movement
- Stock Sizes: 2' x 3', 3' x 4', 3' x 5', 3' x 6', 3' x 10', 4' x 6', 4' x 8'
- Roll Sizes: 3' x 60', 4' x 60', 6' x 60'
- Custom Sizes available in 3', 4', and 6' widths



Outdoor Use



Custom Lengths



RESULTS FROM DEPENDENT TEST LABS & POSSIBLE TO BE COMPARED TO OTHER MATTING ENTRANCE MATS